


PS-P60 Black







POLY-CRYSTALLINE MODULE

260-270 W



Philadelphia Solar
Delivering Clean Energy Solutions

FEATURES

-  Positive power tolerance up to 3% extra output.
-  Excellent low light performance.
-  Salt mist and ammonia resistant to endure coastal and agricultural environments.
-  Excellent high mechanical loads, certified to withstand high wind load (2400 pa) and snow load (5400 pa).
-  In-line and post EL (Electroluminescence) machines.
-  PID resistant.

PHILADELPHIA SOLAR PV MODULES

Philadelphia Solar's Poly-Crystalline modules with power up to **270 Wp** are produced using the state-of-the-art (automated) robotic production lines.

These modules are suitable to be used for most electrical power applications and have excellent durability to prevailing weather conditions.

BENEFITS

- Outstanding technical support.
- Pre and after sales-service.
- 12 years warranty on material and workmanship .
- 25 years linear performance warranty.
- Marketing support to official distributors.
- Customized mounting solutions.

APPLICATIONS



On-Grid Residential
Roof-Tops




On-Grid Commercial/
Industrial Roof-Tops



Off-Grid Systems
(Including Lighting Systems)



Solar Power Plants

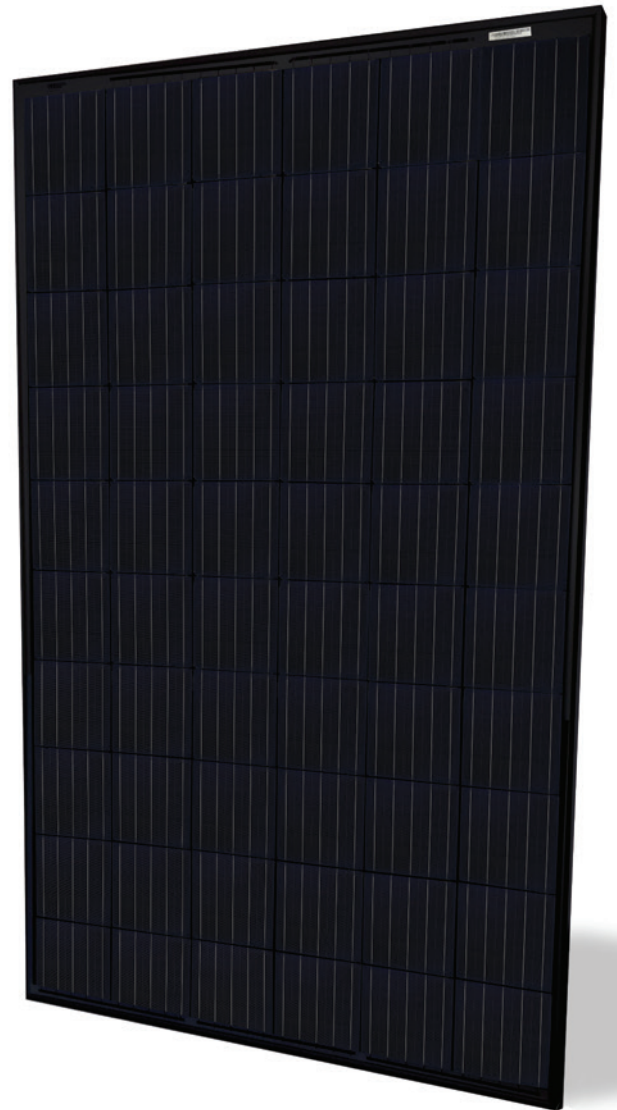

CERTIFICATES




LINEAR PERFORMANCE WARRANTY



PS-P60 Black

POLY-CRYSTALLINE MODULE

260-270W



Philadelphia Solar
Delivering Clean Energy Solutions

ELECTRICAL CHARACTERISTICS

Characteristics (STC)	260W	265W	270W
Open Circuit Voltage - Voc (V)	37.9	38.1	38.3
Short Circuit Current - Isc (A)	8.95	9.03	9.11
Maximum Power Voltage - Vmpp (V)	30.7	30.9	31.2
Maximum Power Current - Impp (A)	8.5	8.58	8.66
Maximum Power - Pmax (W)	260	265	270
Module Efficiency - η (%)	15.9	16.2	16.5

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C). Measuring tolerance: \pm 3%

MATERIAL CHARACTERISTICS

Characteristics	Value
Cells per Module	60
Cell Type	Grade A - Multi-Crystalline Silicon, 156.75x156.75mm
Front Surface	Anti-Reflective Coated Tempered 3.2mm Glass
Encapsulant	PID Free EVA
Back Cover	Black Backsheet
Frame	Black Anodized Aluminum
Junction Box	IP68, 3 Bypass Diodes
Cable and Connector	1m Solar Cables with MC4 interconnection
Fire Classification	C

THERMAL CHARACTERISTICS

Characteristics	Value
Voltage Temperature Coefficient (%/°C)	- 0.33
Current Temperature Coefficient (%/°C)	+ 0.05
Power Temperature Coefficient (%/°C)	- 0.41
NOCT (°C)	46 \pm 2

PACKAGING

Physical Characteristics	Value
Module Dimensions (mm)	1648 x 990 x 40
Module Weight (kg)	19
Pallet Dimensions (mm)	1700 x 1140 x 1130
Modules per Pallet	25
Container Capacity	Value
20 Feet Container	300 Modules
40 Feet High-Cube Container	700 Modules

OPERATING CONDITIONS



Maximum System Voltage - Vmax (V)	1000
Maximum Series Fuse (A)	15
Operating Temperature Range (°C)	IEC: -40 to + 85 / UL: -40 to + 90

WARRANTY

Product	10 Years
Power Output	12 Years; 90% of Power Output 25 Years; 80% of Power Output

- Datasheet is subjected to changes without prior notice, always obtain the most recent version of the datasheet.
- Caution: For professional use only, the installation and handling of PV modules and cleaning modules require professional skills and should only be performed by qualified professionals, please read the Installation and Operation Manual before using the modules, also Cleaning Guidelines.

PS-P60 Black Dimensions

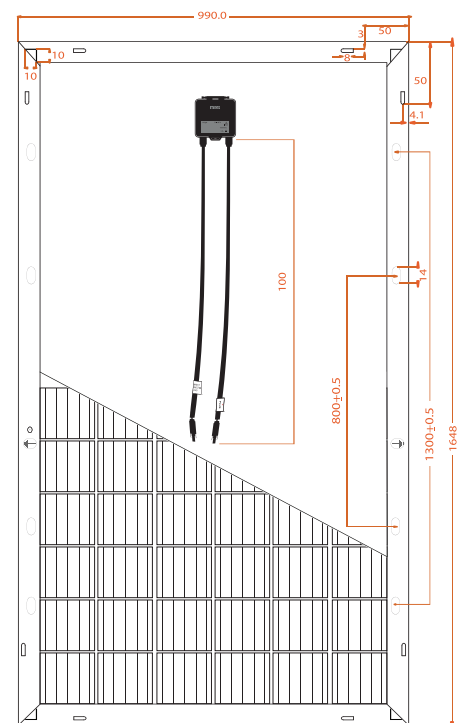

● DIMENSIONS ARE IN MM.

IV - CURVE

