




PHILADELPHIA SOLAR
DELIVERING CLEAN ENERGY SOLUTIONS

PHE^{Next}

PS-M144(HCBF)-GG-xxxW
Half-Cell 10BB Bifacial Double Glass Module

535 -550 Watt (182mm Cell Size)

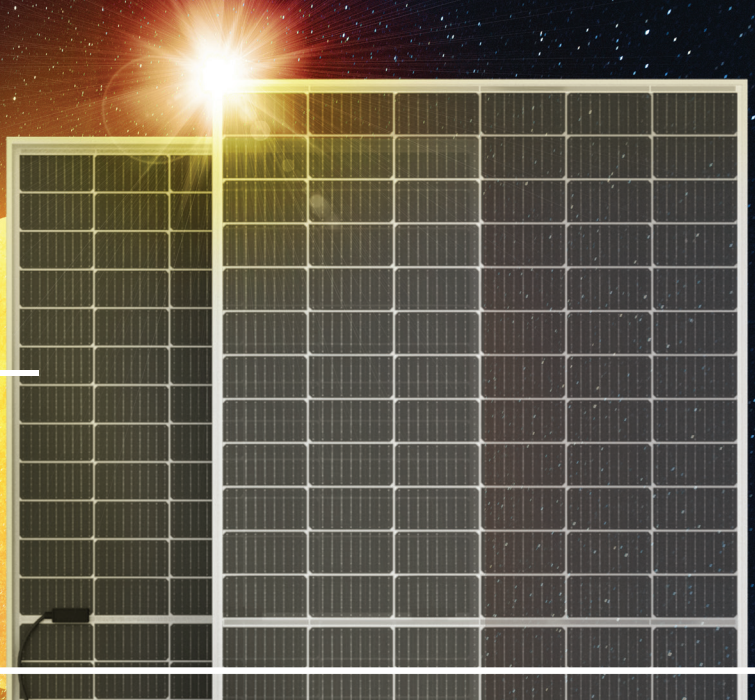

Philadelphia Solar's Mono-Crystalline modules with power up to **550 Wp** are produced using the state-of-the-art (automated) robotic production lines. These modules are suitable to be used for most electrical power applications and have excellent durability to prevailing weather conditions

CERTIFICATIONS

IEC 62782:2016 Dynamic load
IEC TS 62804 PID Resistance
IEC 60068 Dust and Sand Resistance
IEC 62716 Ammonia Resistance
IEC 61701 Salt Mist Resistance
UL 61215 / UL 61730
IEC 61215 / IEC 61730
IEC 61853 PAN File
Bankability Report
EN ISO 9001: 2015
Quality Management System
EN ISO 14001: 2015
Environmental Management System
EN ISO 45001: 2018
Occupational health and safety management systems



APPLICATIONS



On-Grid Commercial/
Industrial Roof-Tops



Off-Grid Systems
(Including Lighting Systems)



Solar Power Plants

FEATURES



Module Efficiency up to **21.29%**



Lower internal resistance loss



Less partial shading current mismatch loss so more power output.



Lower microcrack problem loss comparing with 5-busbar module



Lower degradation PERC technology



Better temperature coefficients come from half-cell design.



Made In Jordan

LINEAR PERFORMANCE WARRANTY



12 Year Product Warranty





30 Year Linear Power Warranty



Only **-0.5%** Annual Degradation

I-V CURVES

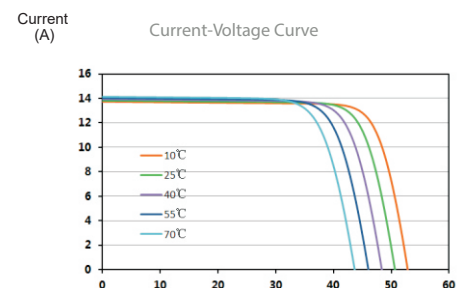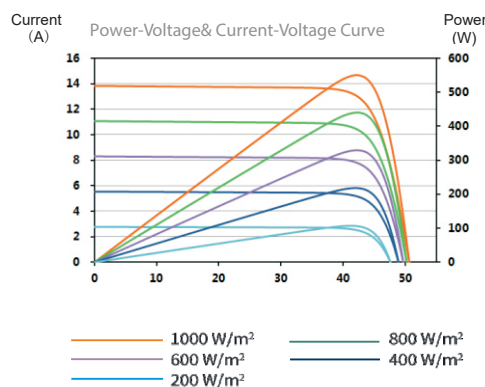

ELECTRICAL CHARACTERISTICS


POWER AT STC	535 W	540W	545 W	550 W
Short Circuit Current - Isc (A)	13.63	13.69	13.77	13.83
Maximum Power Current - Impp (A)	12.79	12.84	12.90	12.96
Open Circuit Voltage - Voc (V)	49.99	50.24	50.40	50.63
Maximum Power Voltage - Vmpp (V)	41.83	42.06	42.25	42.44
Module Efficiency - η' (%)	20.71%	20.90%	21.10%	21.29%
Bifaciality Ratio (%)	65±5%			

Values at Standard Test Conditions STC (Air Mass AM 1.5, Irradiance 1000 W/m², Cell Temperature 25° C).

MATERIAL CHARACTERISTICS

Characteristics	Value
Cells per Module	144 (72 x 2)
Cell Type	Grade A - Mono PERC Crystalline Silicon/10 BB 182x91mm
Front Surface	Semi - Tempered Pattern Coated Glass
Encapsulant	EVA and PO
Back Cover	Semi - Tempered Pattern / Porcelain Glass
Frame	Anodized Aluminum
Junction Box	Protection Degree IP68
Cable Length	300mm Cables Length (Can be Customized)
Fire Classification	Type I

MODULE DRAWINGS

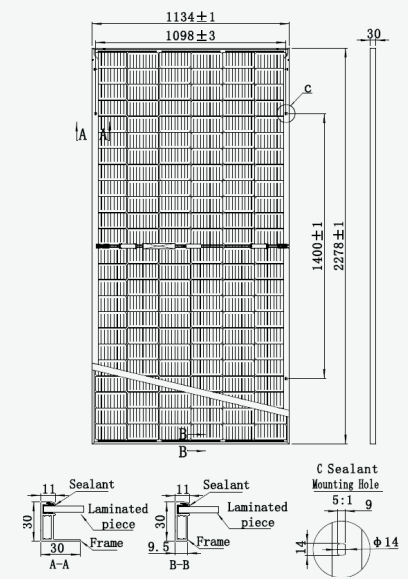

THERMAL CHARACTERISTICS

Characteristics	Value
Open Voltage Temperature Coefficient VOC (%/C°)	-0.267
Short Circuit Current Temperature Coefficient ISC (%/C°)	+0.049
Power Temperature Coefficient PMP (%/C°)	-0.349
NOCT (°C)	45±2

OPERATING CONDITIONS

Maximum System Voltage - Vmax (V)	1500
Maximum Series Fuse (A)	25
Operating Temperature Range (°C)	IEC: -40 to +85 UL: -40 to +90

PHYSICAL CHARACTERISTICS

Characteristics	Value
Module Dimensions (mm)	2278 x 1134 x 30
Module Weight (kg)	32.5 ± 3%
Packaging	Value
Modules per Pallet	36
40 Feet High-Cube Container	720 Modules
Mechanical Load**	Value
Max Static load (Front)	5400 Pa
Max Static load (Back)	2400 Pa
Dynamic load	1000 Pa

- ◆ Power measuring tolerance: ± 3%, other measurements tolerances: ± 5%.
- ◆ Datasheet is subjected to change without prior notice, always obtain the most recent version of the datasheet.
- ◆ ** Caution: For professional use only, the installation and handling of PV modules and cleaning modules require professional skills and should only be performed by qualified professionals, please read the Installation and Operation Manual before using the modules, also Cleaning Guidelines