



PHILADELPHIA SOLAR
DELIVERING CLEAN ENERGY SOLUTIONS

NEXUS

PS-MNG144(HCBF)-xxxW

Half-Cell N-Type 16BB Bifacial Module

580- 600 Watt

Positive power tolerance of 0 ~+3%



Philadelphia Solar's Mono-Crystal-line N-type modules with power up to **600Wp** are produced using the state-of-the-art (automated) robotic production lines. These modules are suitable to be used for most electrical power applications and have excellent durability to prevailing weather conditions

CERTIFICATIONS

UL 61215 / UL 61730
IEC 61215 / IEC 61730
CSA C22.2#61730:2019
HALT TEST Highly Accelerated Life And Extended Reliability Test
IEC 61853 PAN File
IEC TS 62804 PID Resistance
IEC 60068 Dust and Sand Resistance
IEC 62716 Ammonia Resistance
IEC 61701 Salt Mist Resistance
Bankability Report
EN ISO 9001: 2015
Quality Management System
EN ISO 14001: 2015
Environmental Management System
EN ISO 45001: 2018
Occupational health and safety management systems



intertek



APPLICATIONS



On-Grid Commercial/
Industrial Roof-Tops



Off-Grid Systems
(Including Lighting Systems)



Solar Power Plants

FEATURES



Power output increases by 5-25% from the backside resulting in significantly reduced LCOE and (IRR).



Exceptional Anti-PID performance through the use of optimized mass-production processes and strict materials control.



Less partial shading current mismatch loss so more power output.



withstand High Mechanical load :
Front (5400 Pascal)
Back (2400 Pascal)



Improved light trapping and current collection technology enhance module power output and reliability.




Better temperature coefficients come from half-cell design.



Made In Jordan

LINEAR PERFORMANCE WARRANTY

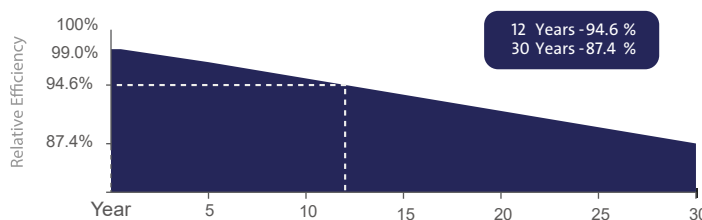

12 Year Product Warranty




30 Year Linear Power Warranty




Only **-0.4%** Annual Degradation

Electrical Performance and characteristics:

Power-Voltage Curve (600W)

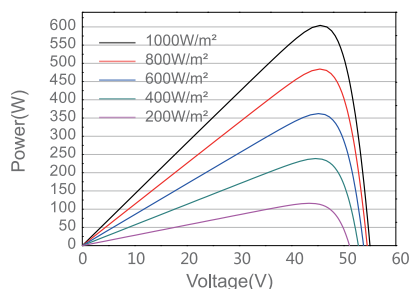

Current-Voltage Curve (600W)

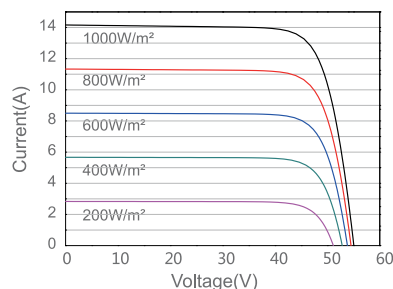

| ELECTRICAL CHARACTERISTICS | | | | | |
|----------------------------------|-------------|-------|--------|--------|--------|
| POWER AT STC | 580 W | 585 W | 590 W | 595 W | 600 W |
| Short Circuit Current - Isc (A) | 14.22 | 14.30 | 14.17 | 14.21 | 14.25 |
| Maximum Power Current - Impp (A) | 13.42 | 13.51 | 13.40 | 13.43 | 13.46 |
| Open Circuit Voltage - Voc (V) | 51.41 | 51.52 | 51.84 | 51.98 | 52.18 |
| Maximum Power Voltage - Vmpp (V) | 43.22 | 43.33 | 44.03 | 44.31 | 44.58 |
| Module Efficiency - η (%) | 22.5% | 22.6% | 22.83% | 23.02% | 23.22% |
| Bifaciality Ratio (%) | 80% \pm 5 | | | | |
| Power tolerance (%) | 0~+3% | | | | |

Values at Standard Test Conditions STC (Air Mass AM 1.5 , Irradiance 1000 W/m² , Cell Temperature 25° C).

MATERIAL CHARACTERISTICS

| Characteristics | Value |
|---------------------|---|
| Cells per Module | 144 (72 x 2) |
| Cell Type | N Type Mono-Crystalline |
| Front Surface | 2mm Semi -Tempered Pattern Coated Glass |
| Back Cover | 2mm Semi -Tempered Pattern /Porcelain Glass |
| Frame | Anodized Aluminum (Black/Silver) |
| Junction Box | IP 68 With Original MC4 |
| Cable Length | 1200mm Cable length could be customized |
| Fire Classification | UL Type 29 |

MODULE DRAWINGS

THERMAL CHARACTERISTICS

| Characteristics | Value |
|--|--------|
| Open Voltage Temperature Coefficient VOC (%/C°) | -0.25 |
| Short Circuit Current Temperature Coefficient ISC (%/C°) | +0.045 |
| Power Temperature Coefficient PMP (%/C°) | -0.29 |
| NOCT (°C) | 45±2 |

PHYSICAL CHARACTERISTICS

| Module Dimensions (mm) | 2279 x 1134 x 30 |
|-----------------------------|------------------|
| Module Weight (kg) | 32.5 ± 1 Kg |
| Packaging | Value |
| Modules per Pallet | 36 |
| 40 Feet High-Cube Container | 720 Modules |
| Mechanical Load** | Value |
| Max Static load (Front) | 5400 Pa |
| Max Static load (Back) | 2400 Pa |
| Dynamic load | 1000 Pa |

OPERATING CONDITIONS

| | |
|-----------------------------------|-----------------------------------|
| Maximum System Voltage - Vmax (V) | 1500 |
| Maximum Series Fuse (A) | 30 |
| Operating Temperature Range (°C) | IEC: -40 to +85 UL: -40 to +90 |

- ◆ Tolerance of power Current and Voltage (ISC,VOC)±5%
- ◆ Datasheet is subjected to change without prior notice, always obtain the most recent version of the datasheet.
- ◆ ** Caution: For professional use only, the installation and handling of PV modules and cleaning modules require professional skills and should only be performed by qualified professionals, please read the Installation and Operation Manual before using the modules, also Cleaning Guidelines