



**PHILADELPHIA SOLAR**  
DELIVERING CLEAN ENERGY SOLUTIONS


# NEXUS

**PS-MNG156(HCBF)-xxxW**

Half-Cell N-Type 16BB Bifacial Module

**605 - 625 Watt**

Positive power tolerance of 0 ~+3%

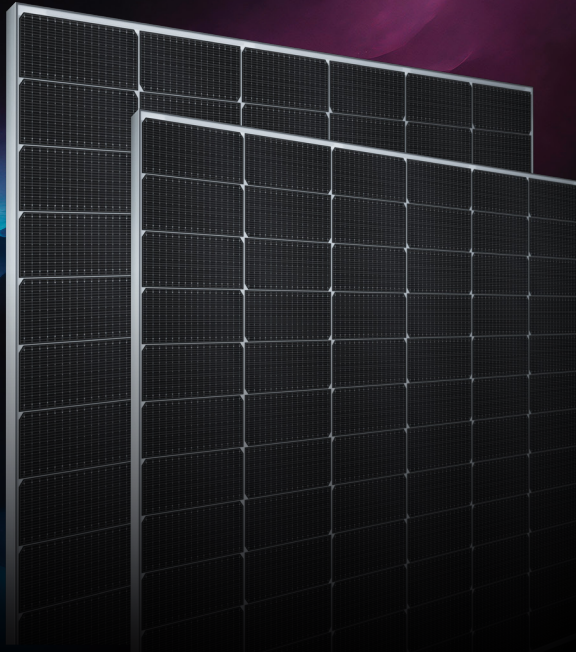

Philadelphia Solar's Mono-Crystalline N-type modules with power up to **625Wp** are produced using the state-of-the-art (automated) robotic production lines. These modules are suitable to be used for most electrical power applications and have excellent durability to prevailing weather conditions

## CERTIFICATIONS

UL 61215 / IEC 61215 : 2021  
UL 61730 / IEC 61730 : 2022  
CSA C22.2#61730:2019  
EN ISO 9001: 2015  
Quality Management System  
EN ISO 14001: 2015  
Environmental Management System  
EN ISO 45001: 2018  
Occupational health and safety management systems



## APPLICATIONS



On-Grid Commercial/  
Industrial Roof-Tops



Off-Grid Systems  
(Including Lighting Systems)



Solar Power Plants

## FEATURES



Power output increases by 5-25% from the backside resulting in significantly reduced LCOE and (IRR).



Exceptional Anti-PID performance through the use of optimized mass-production processes and strict materials control.



Less partial shading current mismatch loss so more power output.



Withstand High Mechanical load :  
Front (5400 Pascal)  
Back (2400 Pascal)



Improved light trapping and current collection technology enhance module power output and reliability.




Better temperature coefficients come from half-cell design.



Made In Jordan

## LINEAR PERFORMANCE WARRANTY

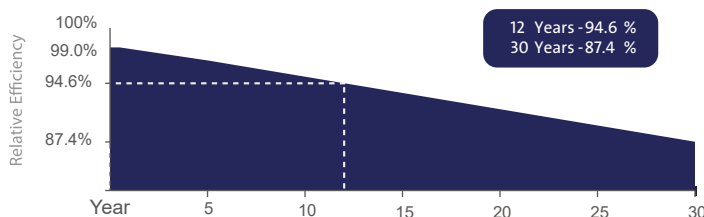

12 Years - 94.6 %  
30 Years - 87.4 %



12 Year Product Warranty




30 Year Linear Power Warranty




Only -0.4% Annual Degradation

## Electrical Performance & Temperature Dependence

Current-Voltage & Power-Voltage Curves (615W)

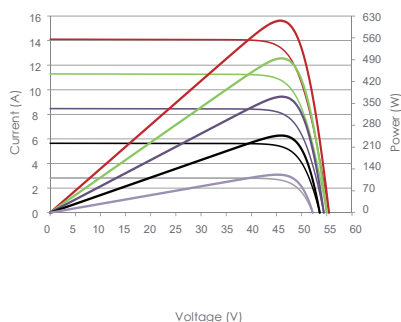

Temperature Dependence of Isc, Voc, Pmax

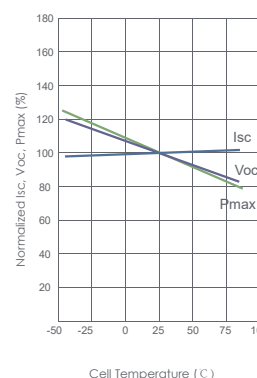

## ELECTRICAL CHARACTERISTICS



POWER AT STC	605 W	610 W	615W	620W	625W
Short Circuit Current - Isc (A)	13.95	14.03	14.11	14.19	14.27
Maximum Power Current - Imp (A)	13.32	13.38	13.44	13.50	13.56
Open Circuit Voltage - Voc (V)	55.17	55.31	55.44	55.58	55.72
Maximum Power Voltage - Vmpp (V)	45.42	45.60	45.77	45.93	46.10
Module Efficiency - $\eta'$ (%)	21.64%	21.82%	22.00%	22.18%	22.36%
Bifaciality Ratio (%)	80% $\pm$ 5				
Power tolerance (%)	0~+3%				

Values at Standard Test Conditions STC (Air Mass AM 1.5, Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25° C).


## MATERIAL CHARACTERISTICS

Characteristics	Value
Cells per Module	156 (78x 2)
Cell Type	N Type(TopCon) Mono-Crystalline
Front Surface	2mm Semi -Tempered Pattern Coated Glass
Back Cover	2mm Semi -Tempered / Porcelain Glass
Frame	Anodized Aluminum (Black/Silver)
Junction Box	IP 68 With original MC4
Cable Length	1200mm Cable length could be customized
Fire Classification	UL Type 29

## MODULE DRAWINGS

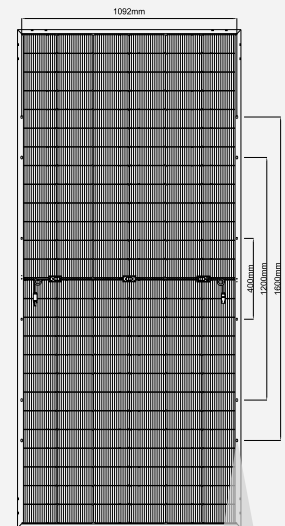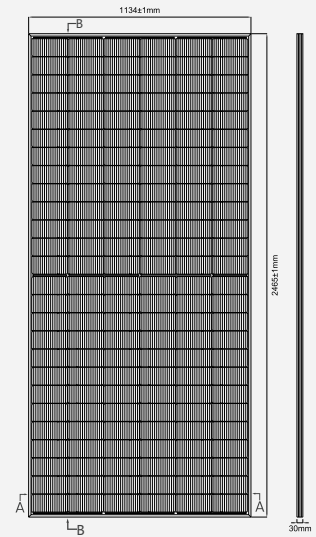

Cross Section A-A&B-B

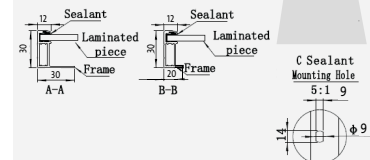

THERMAL CHARACTERISTICS		PHYSICAL CHARACTERISTICS	
Characteristics	Value	Characteristics	Value
Open Voltage Temperature Coefficient VOC (%/C°)	-0.25	Module Dimensions (mm)	2465X1134X30
Short Circuit Current Temperature Coefficient ISC (%/C°)	+0.045	Module Weight (kg)	34.0 $\pm$ 1kg
Power Temperature Coefficient PMP (%/C°)	-0.29	<b>Packaging</b>	<b>Value</b>
NOCT (°C)	45 $\pm$ 2	Modules per Pallet	36
		40 Feet High-Cube Container	576 Modules
		<b>Mechanical Load**</b>	<b>Value</b>
Maximum System Voltage - Vmax (V)	1500	Max Static load (Front)	5400 Pa
Maximum Series Fuse (A)	30	Max Static load (Back)	2400 Pa
Operating Temperature Range (°C)	IEC: -40 to +85 UL: -40 to +90	Dynamic load	1000 Pa

- ◆ Tolerance of power Current and Voltage (ISC,VOC) $\pm$ 3 %
- ◆ Datasheet is subjected to change without prior notice, always obtain the most recent version of the datasheet.
- ◆ \*\* Caution: For professional use only, the installation and handling of PV modules and cleaning modules require professional skills and should only be performed by qualified professionals, please read the Installation and Operation Manual before using the modules, also Cleaning Guidelines